

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 545 709 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**26.11.1997 Bulletin 1997/48**

(51) Int Cl.<sup>6</sup>: **G06F 3/033**

(21) Application number: **92311042.3**

(22) Date of filing: **03.12.1992**

(54) **Liquid crystal display apparatus**  
**Flüssigkristall-Anzeigevorrichtung**  
**Dispositif d'affichage à cristal liquide**

(84) Designated Contracting States:  
**DE GB**

(30) Priority: **06.12.1991 US 805450**

(43) Date of publication of application:  
**09.06.1993 Bulletin 1993/23**

(73) Proprietor: **NCR International, Inc.**  
**Dayton, Ohio 45479 (US)**

(72) Inventor: **Baur, Peter F.**  
**W-8900 Augsburg (DE)**

(74) Representative: **Irish, Vivien Elizabeth**  
**International IP Department,**  
**NCR Limited,**  
**206 Marylebone Road**  
**London NW1 6LY (GB)**

(56) References cited:  
**WO-A-89/09960** **GB-A- 2 162 673**  
**US-A- 4 655 552**

**EP 0 545 709 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

The present invention relates to liquid crystal display apparatus.

Liquid crystal display apparatus is known in which an electronic pen input means is moved across the display screen so as to enter data and also to alter the display. This known apparatus is disadvantageous in that the data input and display drive means render the apparatus disadvantageously heavy, large and expensive. Another form of LCD apparatus is known from WO-A-89/09960 which is capable of displaying an image and allowing simultaneous writing of images into the display by means of an optical pen. However, this apparatus is complex requiring detection circuitry associated with each row and column of pixels in the display and complex driving means.

It is an object of the invention to provide liquid crystal display apparatus that overcomes the above disadvantages.

According to the present invention there is provided a liquid crystal display apparatus comprising a plurality of pixels forming a display screen and means (D,BP) for selectively energizing said pixels so as to provide an image on said display, said means (D,BP) for energizing said pixels including a plurality of light sensitive means (D,BP) comprising photodiode means each associated with a respective pixel and arranged to bring about energization of the respective pixel in response to incoming light and sensing means (SA,RS) for sensing an output from said light sensitive means (D,BP) so as to identify which of said plurality of pixels is to be energized, characterized in that said photodiode means comprise diode means arranged to drive said display.

Advantageously, the invention provides an LCD display which accepts data, in addition to displaying data.

In general, in a liquid crystal display, capacitors apply electric fields across respective pixels in the liquid crystal. In one form of the invention, the switching elements, such as diodes, which apply the charging currents to the capacitors, perform an additional function. They act as photodiodes. They receive light applied by an external light pen. The light induces charging currents into the capacitors. Sensing circuitry detects the charging currents, and stores data into video memory, which now indicates which pixels should be held dark. Thus, the light pen is able to "write" onto the display.

The invention is described further hereinafter, by way of example only, with reference to the accompanying drawings in which:-

Fig. 1 illustrates the rod-like nature of the molecules in a liquid crystal;

Fig. 2 illustrates how an applied electric field can re-orient the molecules of a liquid crystal;

Fig. 3A illustrates a "twisted" liquid crystal cell;

Fig. 3B illustrates how the molecules in a "twisted" liquid crystal cell re-orient themselves in an electric

field;

Fig. 4 illustrates a single cell in a liquid crystal display;

Fig. 5 illustrates part of a matrix of liquid crystal cells;

Fig. 6 illustrates an apparatus for controlling the electric field applied to each cell in the matrix of Fig. 5;

Fig. 6A shows how the MOS transistors in Fig. 6 apply charge to a capacitor whose plates flank a liquid crystal cell;

Fig. 7 illustrates another approach to applying charge to the capacitors;

Figs. 8A to 8D illustrate one form of the invention;

Fig. 9 illustrates a second form of the invention; and Fig. 10 illustrates an alternative embodiment.

A liquid crystal display (LCD) includes a liquid crystal sandwiched between two transparent sheets. As shown in Fig. 1, the liquid crystal is composed of long, rod-like, polarized molecules. In the absence of an electric field, the molecules tend to align themselves with each other, as in Fig. 2A. When a field is applied, which exceeds  $E_0$ , as indicated, the molecules, being electrically polarized, align themselves with the field, as in Fig. 2B. When the field is increased, the molecules further align as in Fig. 2C.

This tendency to align with an electric field can be used to modulate light, as will be explained by reference to Figs 3 and 4. Fig 3A shows a "twisted nematic cell." ("Nematic" is one type of liquid crystal. Two others are "cholesteric" and "smectic.") The molecules can be divided into two types, namely, "body" molecules (ie, those located within the body of the liquid, away from the surface) and "surface" molecules (ie, those at the surface of the body and near the faces of the cell).

The surface molecules are adjacent the faces of the cell, such as faces 3 and 6. These faces are specially treated, in a manner known in the art, in order to induce the surface molecules to align in specific directions. That is, in Fig. 3A, the treatment of face 3 induces the surface molecules 9 to align vertically. The treatment of face 6 induces the surface molecules 12 to align horizontally.

In the absence of an electric field ( $E = 0$ , as indicated), all molecules (body and surface) tend to align with their neighbour molecules. However, because the surface molecules (at faces 3 and 6) already have an alignment imposed by the treated faces, they induce the body molecules to align with them. Further, since the surface molecules at face 3 are perpendicular to those at face 6, the body molecules must make the transition from vertical alignment (at face 3) to horizontal alignment (at face 6). They do this by forming the "twisted" arrangement shown.

When an electric field is applied which greatly exceeds the critical field (ie,  $E \gg E_0$ , as indicated), the body molecules change alignment; they now align themselves with the field instead of with the surface mole-

cules, as shown in Fig. 3B.

The apparatus of Fig. 3 can be used to construct one type of LCD, namely, the "reflective" type, as shown in Fig. 4. Unpolarized incoming radiation, such as interior room light, passes through a polarizing filter 15 and becomes polarized. The direction of polarization is parallel to the molecules at face 3 of the cell, and thus the polarized light is allowed to enter the cell. As the polarized light progresses through the cell, the direction of polarization gradually changes, following the direction of the "twisted" molecules. That is, the "twisted" molecules cause the polarization vector of the light to rotate as the light propagates through the cell. When the polarized light reaches face 6, it has rotated ninety degrees, and its polarization vector is now parallel with the molecules at the second face 6. The light exits the second face 6, passes through a second polarizing filter 18, perpendicular to the first, and is reflected by a mirror 21.

After reflection, the light retraces its steps. It again rotates ninety degrees as it passes through the cell, and exits through the first polarizing filter. Thus, ignoring attenuation occurring within the filters and the cell, the light appears to have been reflected by the mirror 21. The cell looks bright.

If an electric field is applied to the cell, the molecules align as shown in Fig. 3B. The "twisting" disappears, removing the ninety-degree rotation of light within the cell. With the rotation absent, the second polarizing filter 18 blocks transmission of the light, because the light reaching it has the wrong polarization for transmission through it. There is no reflection by the mirror 21, and the cell appears dark.

Other types of LCD cells can use the preceding principles, but omit the mirror. These cells use a light source instead of ambient light. These types are called "backlit."

An actual LCD includes hundreds or thousands of such cells, arranged in a matrix array, as shown by the matrix in Figure 5. When a high voltage is applied to line 24 and a low voltage is applied to line 27, an electric field, analogous to the field in Fig. 2, is placed across cell 21, and the cell behaves as indicated in Figure 3B. The electric field causes the cell to appear dark.

One apparatus for applying the electric field is shown in Fig. 6. When a charge is applied to the gate of one (or more) MOS transistors, a current flows through the transistor and charges a capacitor, between whose plates 30 (shown in Fig. 6A) the liquid crystal lies. The charged plates apply an electric field to the liquid crystal. The charge on the gate will eventually dissipate, but refreshing circuitry, known in the art, periodically replenishes the gate charge. A common refresh rate is in the range of 50 to 100 Hz.

Another apparatus for applying the electric field is shown in Fig. 7. A pair of diodes in series, but oppositely poled, such as BD11, charges each capacitor, such as CP11. When line 34 is at a high voltage and line 36 is at a low voltage, diode BD11 becomes conducting and

charges the capacitor CP11.

(A pair of diodes is used, rather than a single diode, because the voltage on the capacitor must periodically be reversed in polarity. Otherwise, one plate of the capacitor will always be charged from zero to a positive voltage, and tend to permanently align the negative ends of the molecules in a fixed direction. The molecules would thus acquire a "memory," which is undesirable. Periodic reversal of the polarity of the field prevents this permanent orientation, and the bi-lateral diodes allow the reversal.)

Figs. 8A to 8D show one form of the invention. A glass sheet carries column address lines, which are controlled by column switches such as C1, C2, and C3, and row address lines, which are controlled by row addressing switches, such as R1, R2, and R3. A photodiode, such as D11, D12, etc., connects between each row and column crossing. The glass sheet is placed in registration with an LCD, such that the photodiodes are in registration with the pixels of the LCD.

In use, a control 45, known in the art, closes a single row switch, such as switch R1, thereby holding the first row line at a high voltage. Then the control pulls each column line to a low voltage, one-by-one, by successively closing the column switches, beginning with C1. In this manner, the control successively applies a voltage across each diode in the row. That is, the control scans the diodes.

During this scanning, the user positions a light pen 44 at the location where the user wishes to draw a point. When the photodiode, such as D11, at that location is scanned by the control, the photodiode conducts, causing a charging current I to flow, as in Fig. 8D, causing a voltage to appear across resistor  $R_{S1}$ . A differential amplifier SA1 senses the voltage, and stores a ONE in the column register 47 in Fig. 8 for the column containing the diode.

After all columns have been scanned in the present row 1, the column register now contains data which identifies all columns which have been illuminated by the light pen. This data is transferred to the video memory, which illuminates (or darkens) the respective pixels in the row. Then, the column register is cleared, as known in the art, and the scanning process is repeated for the next row. That is, the control 45 opens R1 and closes R2, and all the columns are scanned, as above, to obtain the video data for row 2. This process is repeated until all rows have been scanned.

This scanning is done such that the entire matrix of diodes is scanned about every 10 or 20 milliseconds (ie, a rate of 50 to 100 Hz). This scanning rate is sufficiently fast that, if the user moves the light pen during scanning, the light pen will leave a trail of darkened pixels. That is, the video circuitry draws a visible line which follows the light pen. The system resembles a pen drawing on paper.

A more complex form of the invention is shown in Fig. 9. In this form, the diode matrix of the LCD itself,

such as that shown in Fig. 7 and discussed in the Background, is used to accept the data from the light pen. For example, if the light pen is illuminating the bilateral diode BD11, the diode will conduct, charging the capacitor CP11, and drawing a current through  $R_{S1}$ . A differential amplifier senses the voltage across  $R_{S1}$  and loads a ONE into the column register for column 1. After the entire row is scanned, the data in the column register is transferred to the video memory, whereupon the pixel controlled by CP11 is darkened, as described in the simple form of the invention.

After the data is stored in video memory, the capacitors must be refreshed, because they will dissipate their charge. Refreshing is done by applying a higher voltage across the series connection of CP11 and BD11, sufficient to drive BD11 into conduction for charging CP11. (Previously, the light pen drove BD11 into conduction.)

Thus, in the second form of the invention, two types of scanning cycles for the diodes are undertaken. One cycle is the data acquisition cycle, wherein data is acquired from the light pen 44: each illuminated diode (eg, DB11) causes a signal to arise across the respective sense resistor (eg,  $R_{S1}$ ) and cause data to ultimately be loaded into video memory.

The second cycle is the normal refresh cycle, which refreshes the pixels, based on the data in the video memory. During the second cycle, the voltage difference between the row and column lines is caused to be greater than in the first, and, possibly, of opposite polarity, for reasons discussed above.

Of course, as the following paragraph makes clear, it is not necessary that two distinct scanning steps be used; a single scanning step, which both refreshes and collects data from the light pen, can be used.

Assume that a given pixel is to be held dark, according to the data in video memory. Thus, during refresh, the pixel's capacitor (eg, CP11 in Figs. 8 or 8A) is to be charged. The charging will cause a current through the capacitor's sense resistor (eg,  $R_{S1}$ ). The sense amplifier now believes that the light pen is calling for that pixel to be darkened, even though video memory, not the light pen, is calling for the darkening.

This error is not significant, because it does not matter whether the video memory or the light pen is requesting a dark pixel. The video memory only makes such a request if the light pen previously requested the pixel to be dark. Either way, a ONE is held in the video memory for the pixel in question.

It is noted that the sense resistors can be placed in the row lines, as is phantom resistor 49 in Fig. 9, instead of in the column lines. This type of connection can provide better isolation from the capacitors. That is, it may not be desirable to have the resistors, such as  $R_{S1}$ , connected simultaneously to multiple capacitors, such as CP11 and CP21.

Figure 9 shows two diodes in each bilateral diode, such as BD11. In actuality, these diodes can take the form of a phototransistor having the base lead eliminat-

ed. The emitter-base junction forms one diode, and the collector-base junction form the other diode. When light is applied to the base, it generates carriers, which act like a base current, and can drive the transistor into saturation.

If, as shown in Fig. 8, the pen-position-scanning-mechanism is located on a third sheet, a capacitor to be charged is not necessarily required. The photosensitive diode itself is sufficient. However, in this case, the row and column lines must be isolated from each other, at least at the crossing points. One way to isolate them, which is preferable from a manufacturing perspective, is shown in Fig. 10. The photosensitive diode D is located exactly at the crossing point of the ROW- and COLUMN LINES, perpendicular to the ROW- and COLUMN lines (that is, perpendicular from the point of view of the current path). The diode acts as an insulator when non-actuated, and acts as a connector in the activated case.

## Claims

1. Liquid crystal display apparatus comprising a plurality of pixels forming a display screen and means (D,BP) for selectively energizing said pixels so as to provide an image on said display, said means (D, BP) for energizing said pixels including a plurality of light sensitive means (D,BP) comprising photodiode means each associated with a respective pixel and arranged to bring about energization of the respective pixel in response to incoming light and sensing means (SA,RS) for sensing an output from said light sensitive means (D,BP) so as to identify which of said plurality of pixels is to be energized, characterized in that said photodiode means comprise diode means arranged to drive said display.
2. Apparatus according to claim 1, characterized in that said photodiode means comprise bilateral diode pairs.
3. Apparatus according to claim 2, characterized in that said bilateral diode pairs comprise the collectors and emitters of respective phototransistors.
4. Apparatus according to claims 2 or 3, characterized in that one diode of said pair of bilateral diodes charges a capacitor (CP) of a respective pixel during a refreshing cycle.
5. Apparatus according to any preceding claim, characterized by scanning means (45) to successively apply scanning signals to each of said plurality of pixels in order to acquire data from and to refresh energized pixels.
6. Apparatus according to claim 5, characterized in that said data acquisition and data refreshing are

carried out in a single scanning step.

7. Apparatus according to any preceding claim, characterized by optical filter means in operative relationship with said light sensitive means (D,BP).


#### Revendications

1. Un appareil afficheur à cristaux liquides comprenant une pluralité de points d'image formant un écran de visualisation et un moyen (D, BP) pour exciter sélectivement lesdits points d'image de façon à fournir une image sur ledit écran, ledit moyen (D, BP) pour exciter lesdits points d'image comportant une pluralité de moyens photosensibles (D, BP) comprenant des moyens photodiodes chacun associé à un point d'image respectif et arrangé pour provoquer l'excitation du point d'image respectif en réponse à la lumière entrante et un moyen de captage (SA, RS) pour capter une sortie desdits moyens photosensibles (D, BP) de façon à identifier lequel de ladite pluralité de points d'image doit être excité, caractérisé en ce que lesdits moyens photodiodes comprennent des moyens diodes arrangés pour alimenter ledit écran.
2. Un appareil conformément à la revendication 1, caractérisé en ce que lesdits moyens photodiodes comprennent des paires de diodes bilatérales.
3. Un appareil conformément à la revendication 2, caractérisé en ce que lesdites paires de diodes bilatérales comprennent les collecteurs et les émetteurs de phototransistors respectifs.
4. Un appareil conformément aux revendications 2 ou 3, caractérisé en ce qu'une diode de ladite paire de diodes bilatérales charge un condensateur (CP) d'un point d'image respectif pendant un cycle de rafraîchissement.
5. Un appareil conformément à toute revendication précédente, caractérisé par un moyen de balayage (45) pour appliquer successivement des signaux de balayage à chacun de ladite pluralité de points d'image afin d'acquérir des données des points d'image excités et de rafraîchir ces derniers.
6. Un appareil conformément à la revendication 5, caractérisé en ce que lesdits acquisition des données et rafraîchissement des données sont réalisés en une seule étape de balayage.
7. Un appareil conformément à toute revendication précédente, caractérisé par un moyen filtre optique dans un rapport opérant avec lesdits moyens photosensibles (D, BP).

#### Patentansprüche

1. Flüssigkristall-Anzeigevorrichtung, die eine Vielzahl von Bildpunkten, die einen Anzeigeschirm bilden, und eine Einrichtung (D, BP) zum wahlweisen Aktivieren der Bildpunkte, so daß ein Bild auf der Anzeige bereitgestellt wird, aufweist, wobei die Einrichtung (D, BP) zum Aktivieren der Bildpunkte eine Vielzahl lichtempfindlicher Einrichtungen (D, BP), die eine Photodiodeeinrichtung aufweisen, die jede einem entsprechenden Bildpunkt zugeordnet und zum Hervorbringen einer Aktivierung des entsprechenden Bildpunkts in Erwiderung auf hereinkommendes Licht angeordnet sind, und eine Erfassungseinrichtung (SA, RS) zum Erfassen eines Ausgangswerts von der lichtempfindlichen Einrichtung (D, BP) zum Erkennen, welcher aus der Vielzahl von Bildpunkten zu aktivieren ist, umfaßt, dadurch gekennzeichnet, daß die Photodiodeeinrichtung eine Diodeeinrichtung aufweist, die zum Treiben der Anzeige angeordnet ist.
2. Vorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die Photodiodeeinrichtung zweiseitig gerichtete Diodenpaare aufweist.
3. Vorrichtung nach Anspruch 2, dadurch gekennzeichnet, daß die zweiseitig gerichteten Diodenpaare die Kollektoren und Emittoren entsprechender Phototransistoren aufweisen.
4. Vorrichtung nach Anspruch 2 oder 3, dadurch gekennzeichnet, daß eine Diode des Paares zweiseitig gerichteter Dioden einen Kondensator (CP) eines entsprechenden Bildpunkts während eines Auffrischzyklus lädt.
5. Vorrichtung nach einem vorhergehenden Anspruch, gekennzeichnet durch eine Abtasteinrichtung (45) zum aufeinanderfolgenden Anlegen von Abtastsignalen an jedem der Vielzahl von Bildpunkten zum Erfassen von Daten von aktivierten Bildpunkten und zum Auffrischen von diesen.
6. Vorrichtung nach Anspruch 5, dadurch gekennzeichnet, daß die Datenerfassung und das Datenauffrischen in einem einzelnen Abtastschritt ausgeführt werden.
7. Vorrichtung nach einem vorhergehenden Anspruch, gekennzeichnet durch eine optische Filtereinrichtung in Betriebsbeziehung mit der lichtempfindlichen Einrichtung (D, BP).


**FIG. 1**

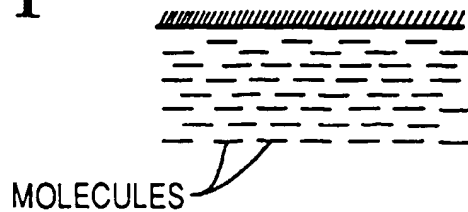

**FIG. 2A**

**FIG. 2B**


**FIG. 2C**

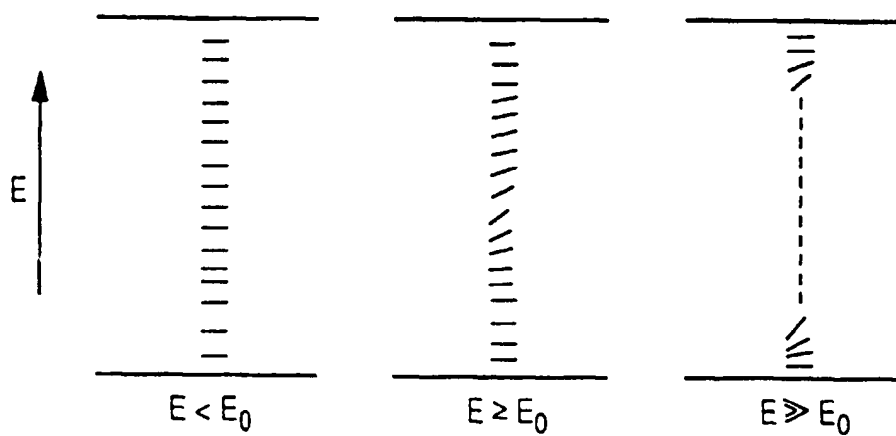


**FIG. 3A**

**FIG. 3**


**FIG. 3B**

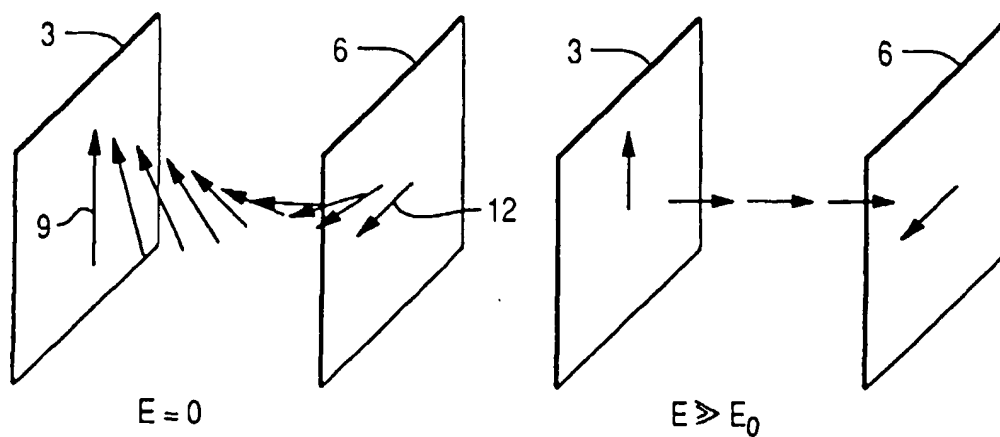


**FIG. 4**

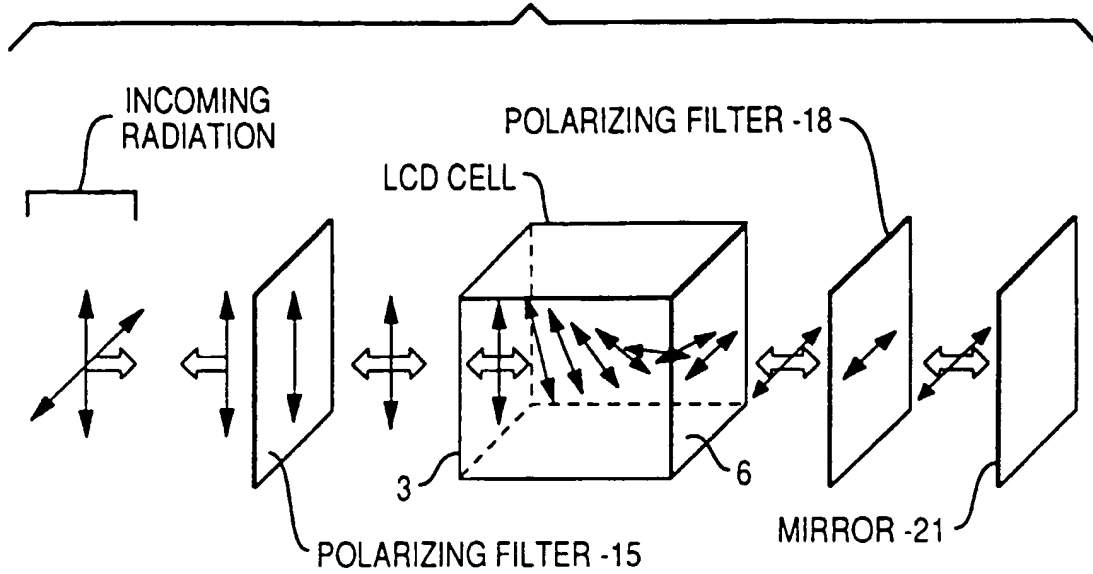


**FIG. 5**

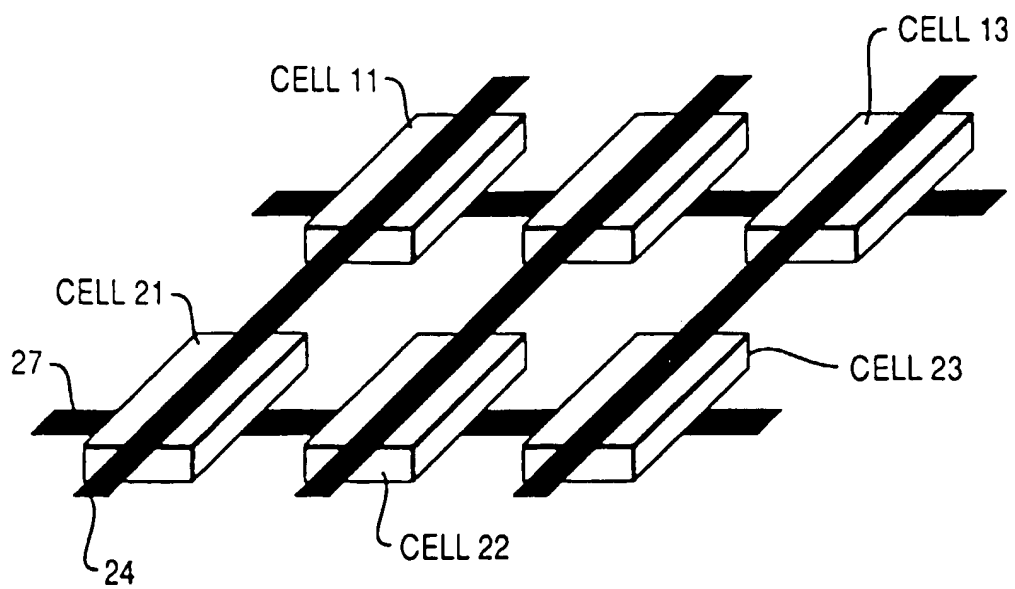


**FIG. 6**

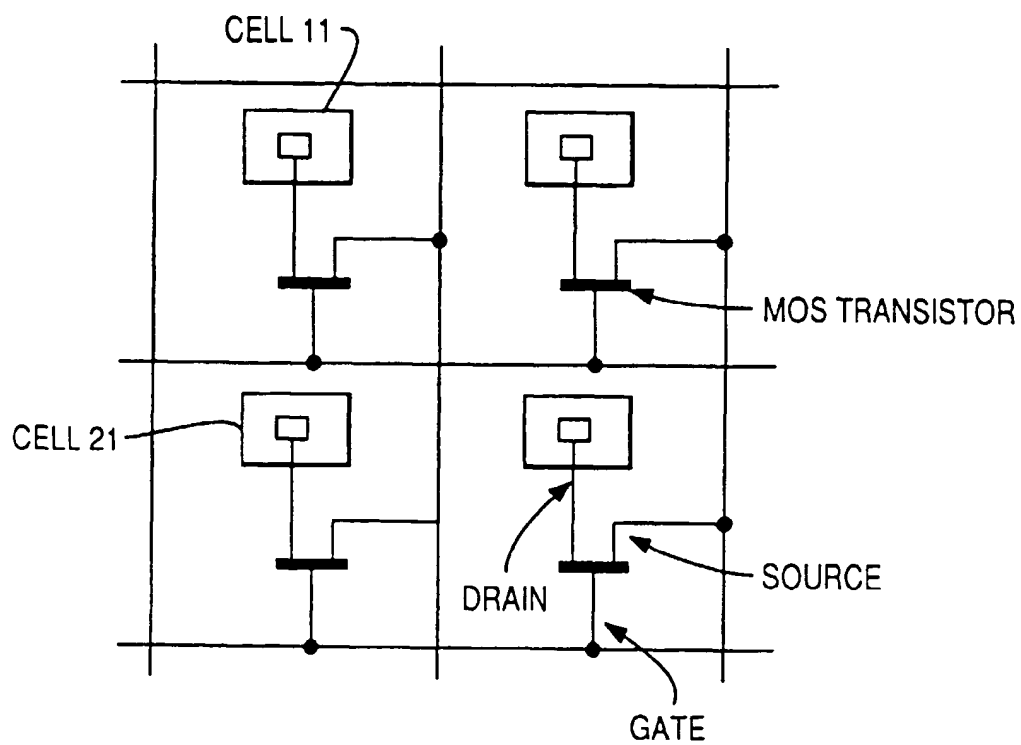


**FIG. 6A**

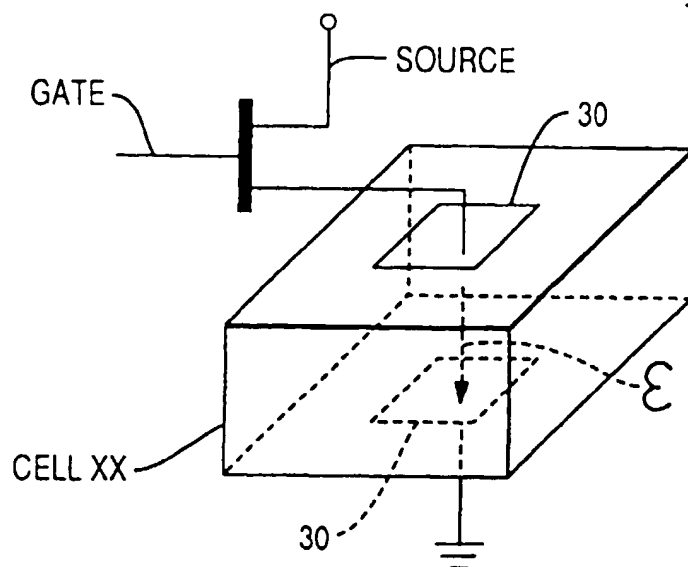


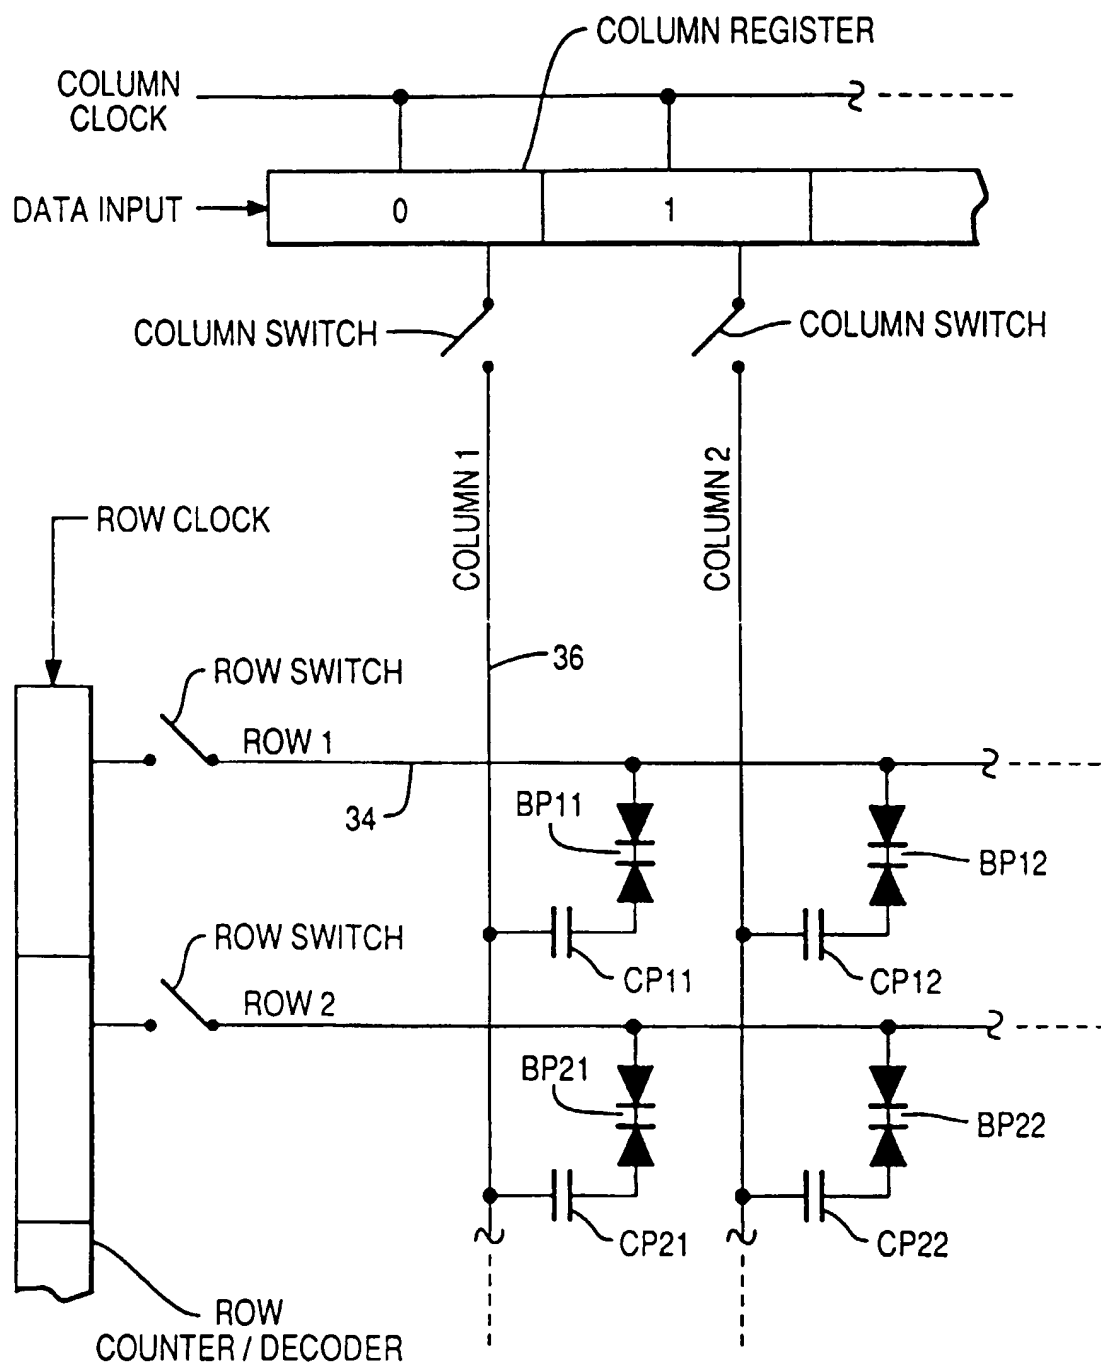


**FIG. 7**

**FIG. 8A**

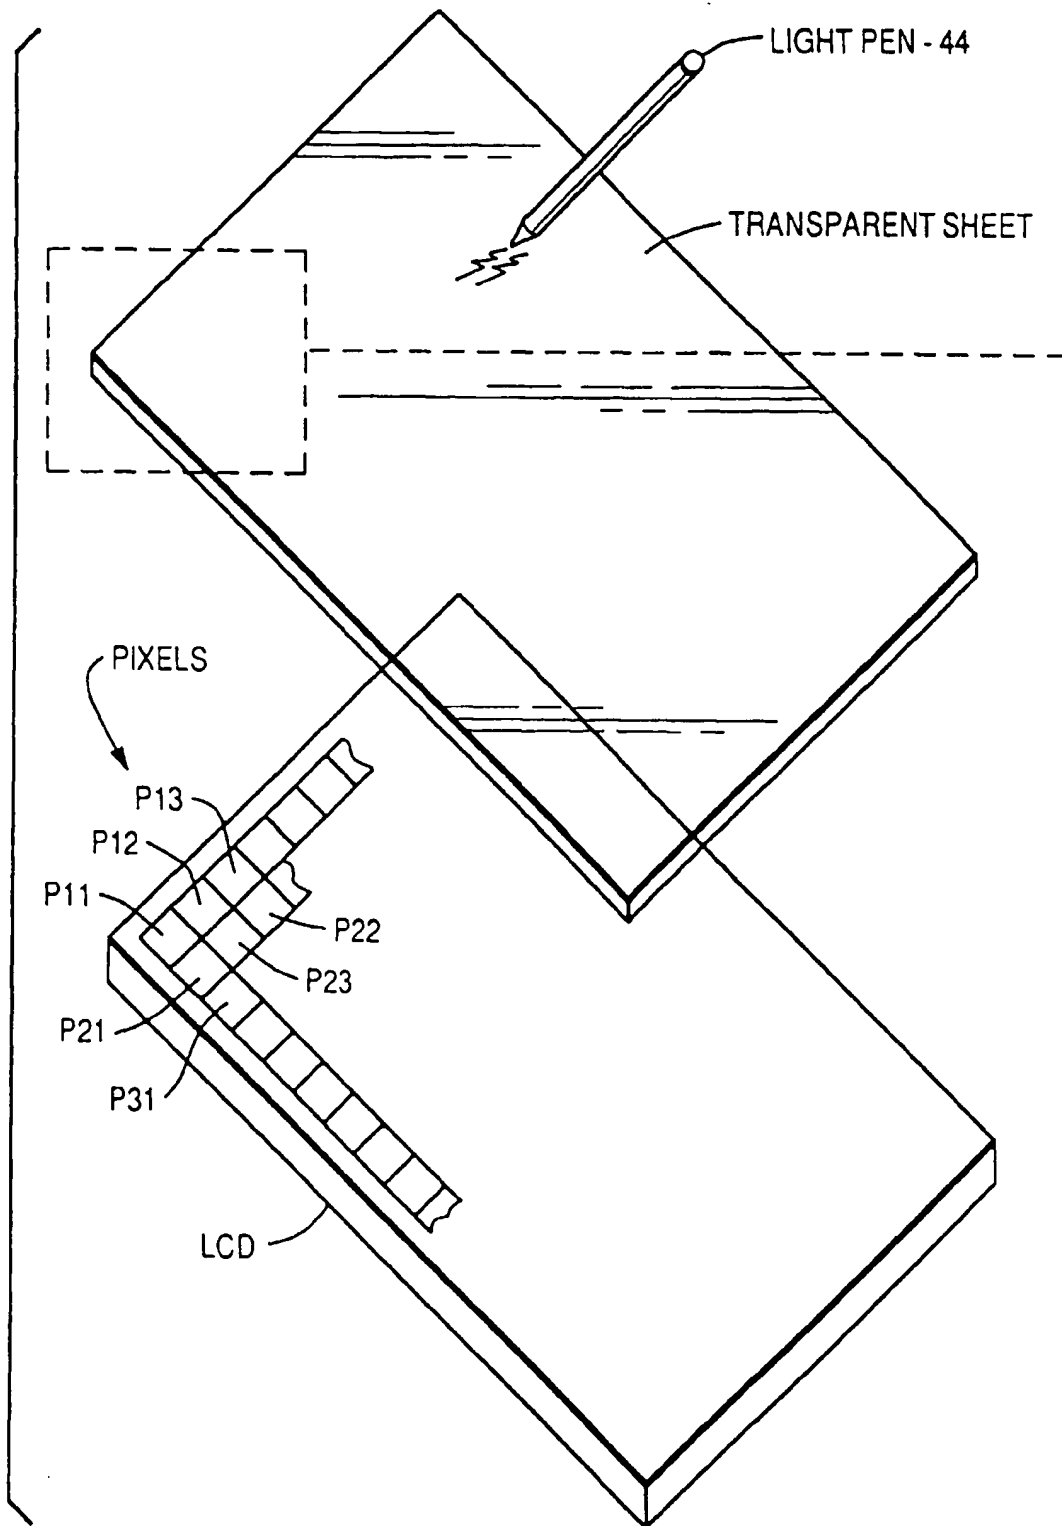

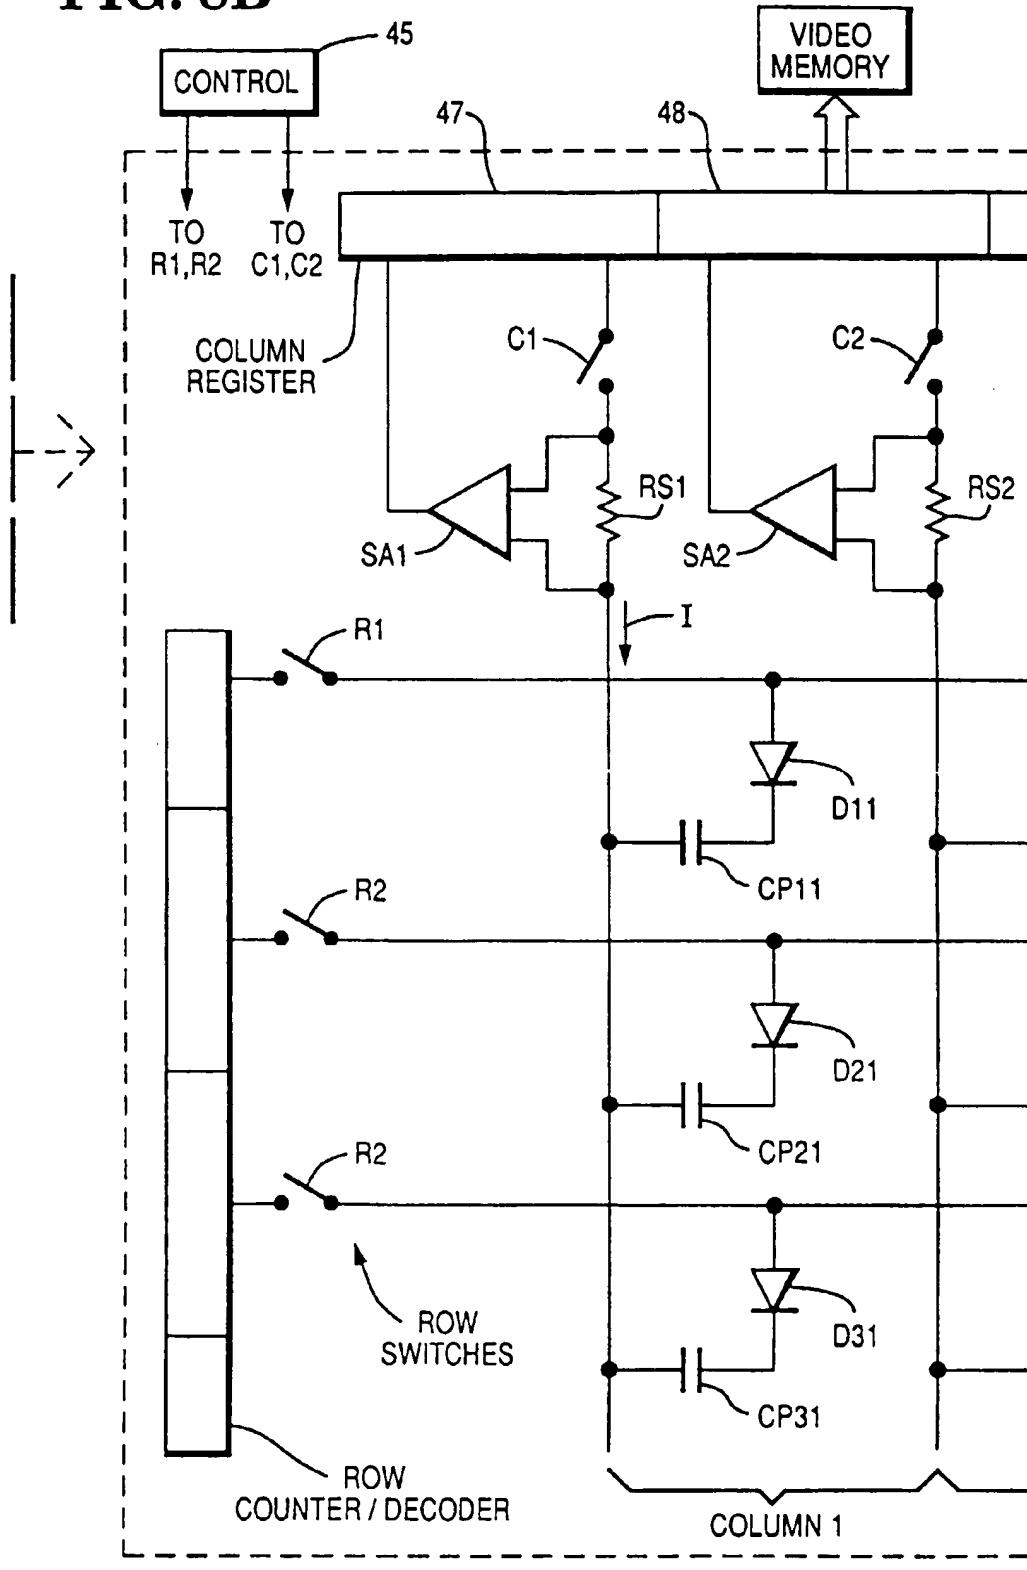**FIG. 8B**

**FIG. 8C**

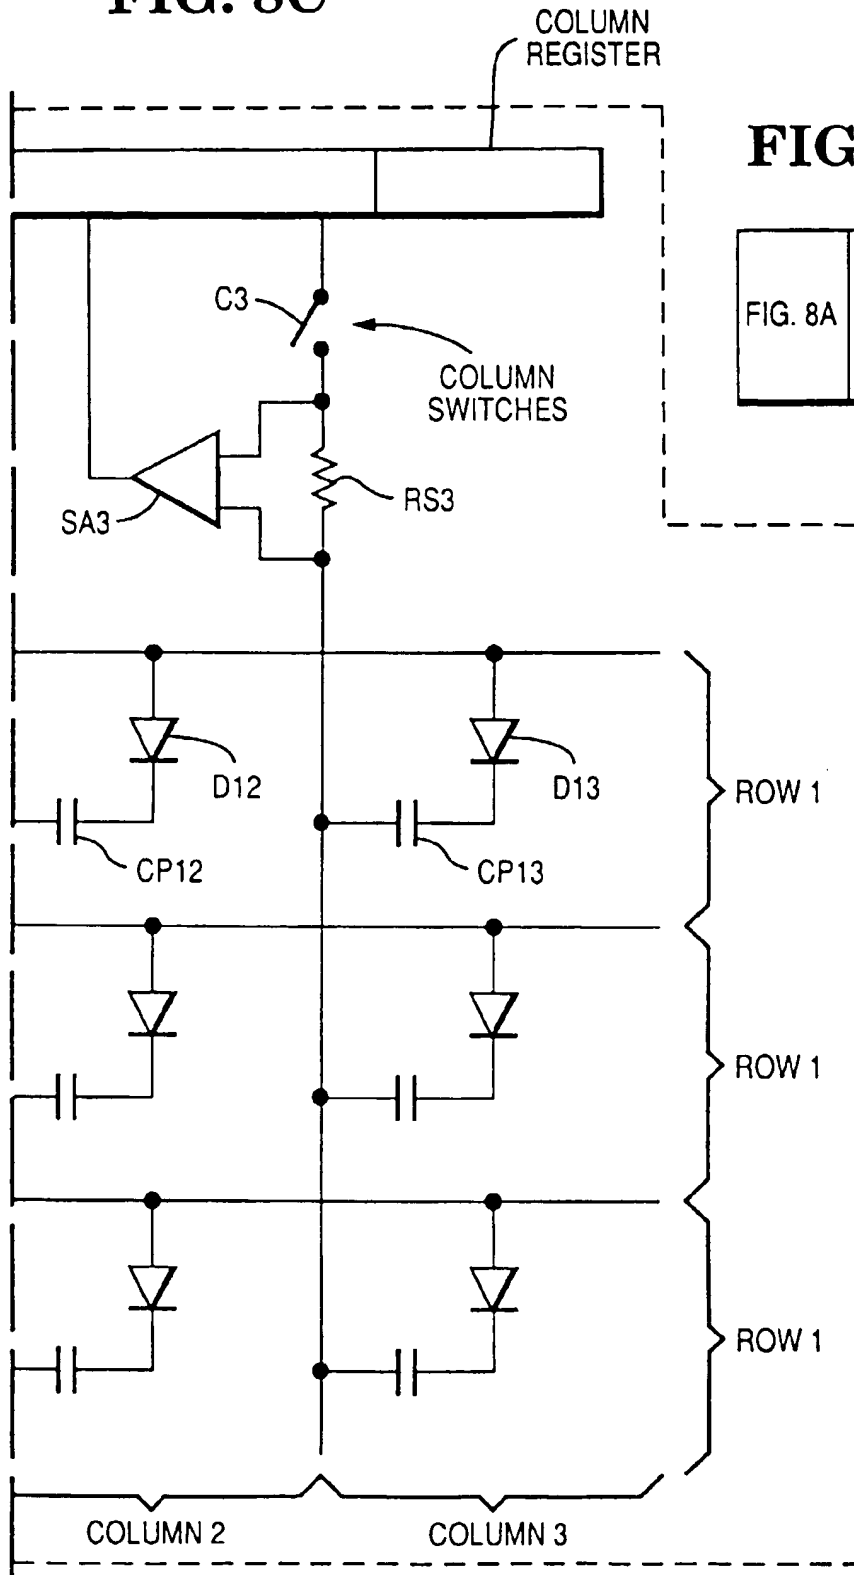

**FIG. 8**

FIG. 8A	FIG. 8B	FIG. 8C
---------	---------	---------

**FIG. 8D**


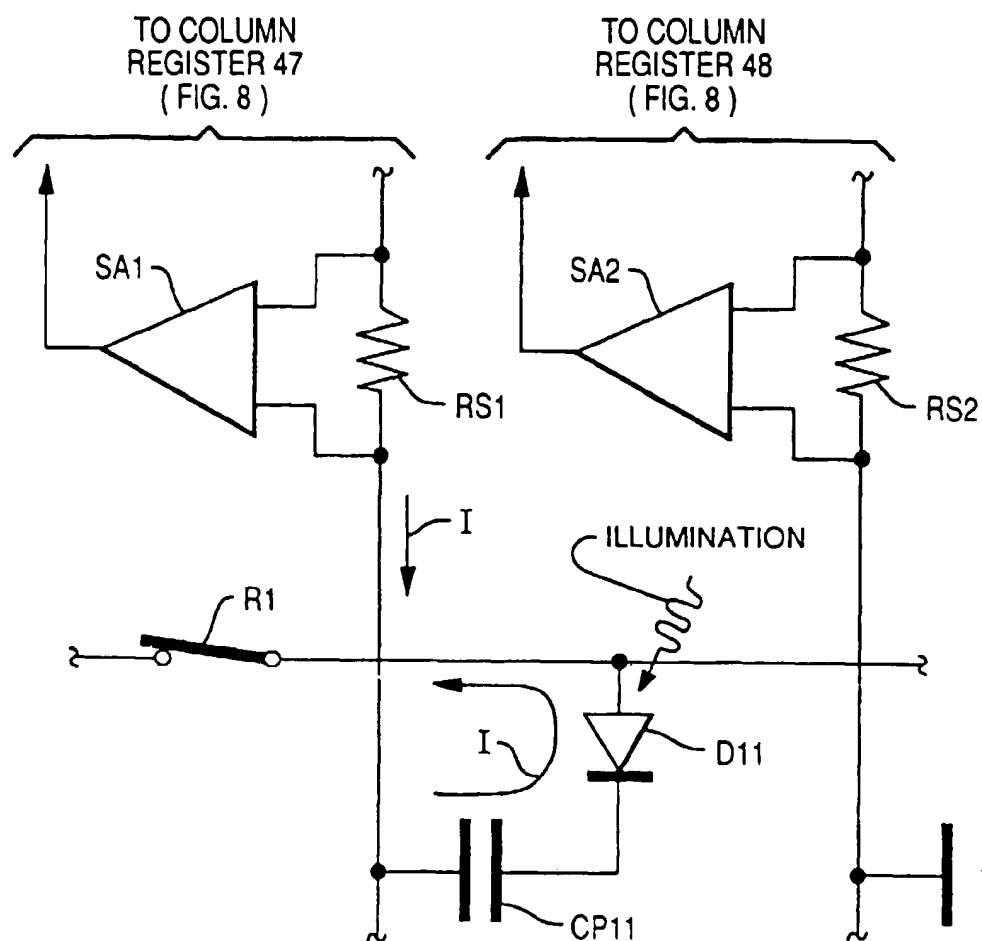


FIG. 10

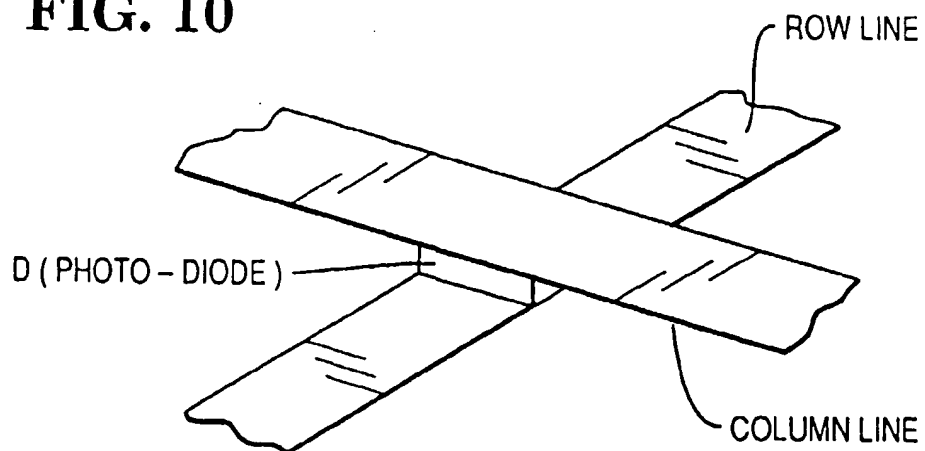

**FIG. 9**